PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF THE RECORDING OF A CHANGE

(PCT Rule 92bis.1 and Administrative Instructions, Section 422)

To:

MOORE, John, Hamilton
J. H. Moore & Co.
8 Gaiafields Road
Lichfield
Staffs WS13 7LT
ROYAUME-UNI

Date of mailing (day/month/year)
01 August 2000 (01.08.00)

Applicant's or agent's file reference
P.1102Cog(PCT)

IMPORTANT NOTIFICATION

International application No.
PCT/GB99/01622

International filing date (day/month/year)
21 May 1999 (21.05.99)

1. The following indications appeared on record concerning:

[X] the applicant [ ] the inventor [ ] the agent [ ] the common representative

Name and Address
CHART MARSTON LIMITED
110 Whitchurch Road
Cardiff CF4 3LY
United Kingdom

State of Nationality: GB
State of Residence: GB
Telephone No.:
Facsimile No.:
Teleprinter No.:

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

[ ] the person [ ] the name [X] the address [ ] the nationality [ ] the residence

Name and Address
CHART HEAT EXCHANGERS LIMITED
110 Whitchurch Road
Cardiff CF4 3LY
United Kingdom

State of Nationality: GB
State of Residence: GB
Telephone No.:
Facsimile No.:
Teleprinter No.:

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

[X] the receiving Office
[ ] the International Searching Authority
[X] the International Preliminary Examining Authority
[ ] the designated Offices concerned
[X] the elected Offices concerned
[ ] other:

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer
Maria Victoria CORTIELLO

Telephone No.: (41-22) 338.83.38

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Assistant Commissioner for Patents
United States Patent and Trademark Office
Box PCT
Washington, D.C.20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 03 February 2000 (03.02.00)	
International application No. PCT/GB99/01622	**Applicant's or agent's file reference** P.1102Cog(PCT)
International filing date (day/month/year) 21 May 1999 (21.05.99)	**Priority date** (day/month/year) 12 June 1998 (12.06.98)
Applicant SYMONDS, Keith, Thomas	

1. The designated Office is hereby notified of its election made:

[X] in the demand filed with the International Preliminary Examining Authority on:

21 December 1999 (21.12.99)

[ ] in a notice effecting later election filed with the International Bureau on:

2. The election [X] was

[ ] was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO **34, chemin des Colombettes** **1211 Geneva 20, Switzerland**	Authorized officer Olivia RANAIVOJAONA
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

16

PATENT COOPERATION TREATY

PCT

REC'D 20 JUN 2000
WIPO PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
P.1102Cog.PCT		
International application No.	International filing date *(day/month/year)*	Priority date *(day/month/year)*
PCT/GB99/01622	21/05/1999	12/06/1998
International Patent Classification (IPC) or national classification and IPC F28D9/00		
Applicant CHART MARSTON LIMITED et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 5 sheets, including this cover sheet.

   ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

   These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

   - I ☒ Basis of the report
   - II ☐ Priority
   - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
   - IV ☐ Lack of unity of invention
   - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
   - VI ☐ Certain documents cited
   - VII ☒ Certain defects in the international application
   - VIII ☐ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
21/12/1999	16.06.2000
Name and mailing address of the international preliminary examining authority: European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Martínez Rico, C Telephone No. +49 89 2399 2750

Form PCT/IPEA/409 (cover sheet) (January 1994)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB99/01622

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-18 as originally filed

Claims, No.:

1-19 as originally filed

Drawings, sheets:

1/9-9/9 as originally filed

2. The amendments have resulted in the cancellation of:

☐ the description, pages:
☐ the claims, Nos.:
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-19
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-18
	No:	Claims	19
Industrial applicability (IA)	Yes:	Claims	1-19
	No:	Claims	

2. Citations and explanations

see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

see separate sheet

Ad section V.2:

1. To claim 1.

Claim 1 satisfies the criteria of novelty, inventive step and industrial applicability, as defined in Article 33 PCT. In the following an analysis of the state of the art and the inventive step is provided.

1.1 State of the art:

Document US-A-5 193 611 shows a heat exchanger with perforated plates, having column precursors linked by means of ligaments. The function of such a perforated plate is to induce turbulent flow. Nevertheless, the column precursors of the plates are not coincident with the column precursors of the adjacent plate and the ligaments have the same thickness as the plate.

Document GB-A-1 172 247 does not describe a perforated plate; in order to induce the turbulent flow, a mesh formed by bars is located between non-perforated plates (see figure 6).

Document WO 98/55812, published after the filing date of the application, shows a heat exchanger comprising perforated plates as in the application (see figures 2A and 2B). Nevertheless the column precursors are not coincident with those of the adjacent plate.

1.2 Inventive step:

The invention provides an alternative way of inducing turbulence in a heat exchanger. It consists in a heat exchanger comprising perforated plates, each having column precursors linked by ligaments, the column precursors of one plate being coincident with those of the adjacent plate, the ligaments being thinner than the plate. In order to flow from the inlet to the outlet, the fluid has got to pass around the columns and through the ligaments. Therefore turbulence is induced and an excellent heat transfer is achieved.

Thus the subject matter of claim 1 fullfils the requiremenst of Article 33(2)-(3) PCT.

2. To claims 2-18.

Claims 2 to 18 are dependent on claim 1 and as such also meet the requirements of the PCT with respect to novelty and inventive step.

3. To claim 19.

The present application does not meet the requirements of Article 33(3) PCT, because the subject matter of claim 19 does not involve an inventive step.

Document US-A-5 193 611 shows (see figures 1 and 2) a perforated plate (21), wherein the plate has an array of spaced column precursors (22), the column precursors being of thickness equal to the plate thickness and being joined together by ligaments (see the contacting nodes in figure 2), each ligament extending between a pair of adjacent column precursor .

The subject matter of claim 19 differs from document US-A-5 193 611 in that the ligaments have a thickness less than the plate thickness. When the skilled man piles up the plates in order to built a heat exchanger, it is necessary to construct a plate with a different thickness, so that the fluid can flow between the different plates, so as to arrive at a plate according to claim 19. Therefore claim 19 does not involve an inventive step.

Ad section VII.:

A document reflecting the prior art described on page 1 should have been identified in the description (Rule 5.1(a)(ii) PCT).

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	FOR FURTHER ACTION	see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.
P.1102Cog(PCT)		
International application No.	International filing date *(day/month/year)*	(Earliest) Priority Date *(day/month/year)*
PCT/GB 99/01622	21/05/1999	12/06/1998
Applicant		
CHART MARSTON LIMITED et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

[X] It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**

   a. With regard to the **language,** the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

   [ ] the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

   b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

   [ ] contained in the international application in written form.

   [ ] filed together with the international application in computer readable form.

   [ ] furnished subsequently to this Authority in written form.

   [ ] furnished subsequently to this Authority in computer readble form.

   [ ] the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

   [ ] the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. [ ] **Certain claims were found unsearchable** (See Box I).

3. [ ] **Unity of invention is lacking** (see Box II).

4. With regard to the **title,**

   [X] the text is approved as submitted by the applicant.

   [ ] the text has been established by this Authority to read as follows:

5. With regard to the **abstract,**

   [X] the text is approved as submitted by the applicant.

   [ ] the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No. 2

   [X] as suggested by the applicant.

   [ ] because the applicant failed to suggest a figure.

   [ ] because this figure better characterizes the invention.

   [ ] None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/01622

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F28D9/00 F28F3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 F28D F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 172 247 A (A.P.V. COMPANY) 26 November 1969 (1969-11-26)	13
A	page 2, line 33 - page 3, line 21; figures 1-6	1,2,4,8, 9,13
A	US 5 016 707 A (NGUYEN DAM C) 21 May 1991 (1991-05-21) column 6, line 19 - column 8, line 63; figures 1-11	1-3,6,19
A	US 5 193 611 A (HESSELGREAVES JOHN E) 16 March 1993 (1993-03-16) column 3, line 51 - column 5, line 40; claim 6; figures	1-5, 8-11,19

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 August 1999	31/08/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Van Dooren, M

2

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/01622

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 98 55812 A (CHART MARSTON LIMITED ;SYMONDS STEVEN PAUL (GB); SYMONDS KEITH THO) 10 December 1998 (1998-12-10) page 10, paragraph 7 - page 20; figures	1,5, 12-16
A	EP 0 111 459 A (PUCCI TAMARA ;MANDORLINI ORETTA (IT)) 20 June 1984 (1984-06-20)	
A	EP 0 780 654 A (MERLONI TERMOSANITARI SPA ;IL GAS P A SOC IT (IT)) 25 June 1997 (1997-06-25)	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 99/01622

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1172247 A	26-11-1969	AT 277294 B	29-12-1969
		DE 1551430 A	23-04-1970
		DK 129426 B	07-10-1974
		FR 1519235 A	11-07-1968
		NL 6705482 A,B	23-10-1967
		SE 333942 B	05-04-1971
US 5016707 A	21-05-1991	NONE	
US 5193611 A	16-03-1993	AU 640650 B	02-09-1993
		AU 5555190 A	29-11-1990
		CA 2050281 A	05-11-1990
		EP 0470996 A	19-02-1992
		WO 9013784 A	15-11-1990
		GB 2251679 A,B	15-07-1992
		JP 2862213 B	03-03-1999
		JP 4505046 T	03-09-1992
WO 9855812 A	10-12-1998	AU 7666798 A	21-12-1998
		GB 2328275 A	17-02-1999
		GB 2333350 A	21-07-1999
		GB 2333351 A	21-07-1999
EP 0111459 A	20-06-1984	IT 1192543 B	20-04-1988
		JP 59142382 A	15-08-1984
EP 0780654 A	25-06-1997	IT T0951023 A	19-06-1997
		CA 2193406 A	20-06-1997

INTERNATIONAL SEARCH REPORT

Inte .ional Application No
PCT/GB 99/01622

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F28D9/00 F28F3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 F28D F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 172 247 A (A.P.V. COMPANY) 26 November 1969 (1969-11-26)	13
A	page 2, line 33 - page 3, line 21; figures 1-6	1,2,4,8, 9,13
A	US 5 016 707 A (NGUYEN DAM C) 21 May 1991 (1991-05-21) column 6, line 19 - column 8, line 63; figures 1-11	1-3,6,19
A	US 5 193 611 A (HESSELGREAVES JOHN E) 16 March 1993 (1993-03-16) column 3, line 51 - column 5, line 40; claim 6; figures	1-5, 8-11,19

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the pnority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 August 1999	31/08/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Van Dooren, M

2

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/01622

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category '	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 98 55812 A (CHART MARSTON LIMITED ;SYMONDS STEVEN PAUL (GB); SYMONDS KEITH THO) 10 December 1998 (1998-12-10) page 10, paragraph 7 - page 20; figures ---	1,5, 12-16
A	EP 0 111 459 A (PUCCI TAMARA ;MANDORLINI ORETTA (IT)) 20 June 1984 (1984-06-20) ---	
A	EP 0 780 654 A (MERLONI TERMOSANITARI SPA ;IL GAS P A SOC IT (IT)) 25 June 1997 (1997-06-25) -----	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 99/01622

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1172247 A	26-11-1969	AT 277294 B	29-12-1969
		DE 1551430 A	23-04-1970
		DK 129426 B	07-10-1974
		FR 1519235 A	11-07-1968
		NL 6705482 A,B	23-10-1967
		SE 333942 B	05-04-1971
US 5016707 A	21-05-1991	NONE	
US 5193611 A	16-03-1993	AU 640650 B	02-09-1993
		AU 5555190 A	29-11-1990
		CA 2050281 A	05-11-1990
		EP 0470996 A	19-02-1992
		WO 9013784 A	15-11-1990
		GB 2251679 A,B	15-07-1992
		JP 2862213 B	03-03-1999
		JP 4505046 T	03-09-1992
WO 9855812 A	10-12-1998	AU 7666798 A	21-12-1998
		GB 2328275 A	17-02-1999
		GB 2333350 A	21-07-1999
		GB 2333351 A	21-07-1999
EP 0111459 A	20-06-1984	IT 1192543 B	20-04-1988
		JP 59142382 A	15-08-1984
EP 0780654 A	25-06-1997	IT T0951023 A	19-06-1997
		CA 2193406 A	20-06-1997

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : F28D 9/00, F28F 3/02 — A1

(11) International Publication Number: **WO 99/66280**

(43) International Publication Date: 23 December 1999 (23.12.99)

(21) International Application Number: PCT/GB99/01622

(22) International Filing Date: 21 May 1999 (21.05.99)

(30) Priority Data:

9812560.2	12 June 1998 (12.06.98)	GB
9903868.9	20 February 1999 (20.02.99)	GB

(71) Applicant *(for all designated States except US)*: CHART MARSTON LIMITED [GB/GB]; 110 Whitchurch Road, Cardiff CF4 3LY (GB).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: SYMONDS, Keith, Thomas [GB/GB]; 4 Lansdowne Avenue, Codsall, Staffs WV8 2EN (GB).


(74) Agent: MOORE, John, Hamilton; J. H. Moore & Co., 8 Gaiafields Road, Lichfield, Staffs WS13 7LT (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: HEAT EXCHANGER

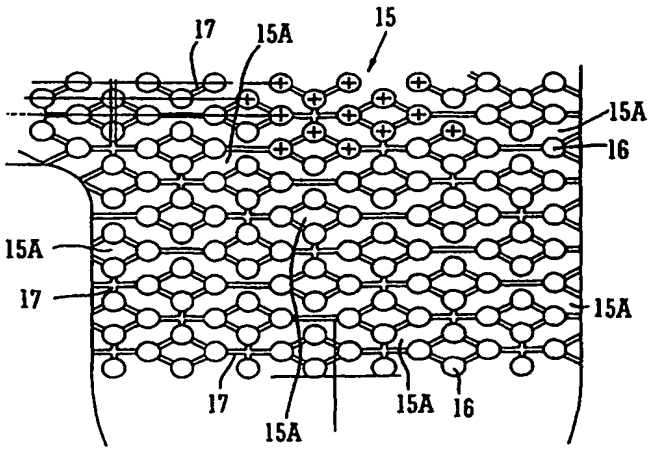

(57) Abstract

The invention provides an improved heat exchanger of the so–called "pin–fin" type. The heat exchanger comprises a stack of parallel perforated plates (10, 20, 30, 70, 80), each plate (10, 20, 30, 70, 80) of the stack having perforations (15A), characterised in that the perforations (15A) define an array of spaced column precursors (16, 21, 31), of thickness equal to the plate thickness, the column precursors (16, 21, 31) being joined together by ligaments (17, 22A, 22B, 32, 33), each ligament extending between a pair of adjacent column precursors, the ligaments (17, 22A, 22B, 32, 33) having a thickness less than the plate thickness, the column precursors (16, 21, 31) of any one plate being coincident in the stack with the column precursors (16, 21, 31) of any adjacent plate whereby the stack is provided with an array of individual columns, each column extending perpendicularly to the plane of the plates (10, 20, 30, 70, 80), whereby fluid flowing through the stack is forced to follow a tortuous flow path to flow around the columns.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

HEAT EXCHANGER

This invention relates to heat exchangers and is particularly concerned with heat exchangers of the so-called "pin-fin" type.

"Pin-fin" type heat exchangers have been well known in principle for many years and consist essentially of a stack of thin metal plates, adjacent pairs of plates in the stack being separated by a plurality of spaced columns - or pins, which act as the heat exchanger fins, i.e. they create the desired secondary surfaaces. Fluid flowing through the stack passes between adjacent pairs of plates and is forced to follow a tortuous path to flow around the pins in its travel from one side of the stack to the other. Such flow, and the turbulence caused by the pins, leads, theoretically, to good heat transfer properties for the stack.

The pins are essentially columns of solid metal which have to be bonded at their ends to a pair of plates so that the pins are sandwiched between and perpendicular to the plates. The plates form the primary surfaces of the heat exchanger and separate different flow streams and the pins, as indicated above, provide secondary surface areas.

Preferably, the pins need to be bonded, e.g. by brazing, welding, diffusion bonding or any other possible means, in a manner to minimise surface contact resistance.

In practice, however, it has proved difficult to make a satisfactory pin fin stack. It has proved difficult to maintain the pins at their correct spacing relative to each other while creating the necessary conditions, e.g. of temperature and pressure, for satisfactory bonding of the plates and the pins to take place.

It is, therefore, an object of the present invention to provide improved pin-fin heat exchangers that can be accurately and consistently manufactured to the required tolerances and that have improved heat exchange capability

Accordingly, in one aspect the invention provides a heat exchanger, the heat exchanger comprising a stack of parallel perforated plates, each plate of the stack having perforations, characterised in that the perforations define an array of spaced column precursors, of thickness equal to the plate thickness, the column precursors being joined together by ligaments, each ligament extending between a pair of adjacent column precursors, the ligaments having a thickness less than the plate thickness, the column precursors of any one plate being coincident in the stack with the column precursors of any adjacent plate whereby the stack is provided with an array of individual columns, each column extending perpendicularly to the plane of the plates, whereby fluid flowing through the stack is forced to follow a tortuous flow path to flow around the columns.

Preferably the ligaments of each plate of each pair of adjacent plates are displaced relative to those of the other plate of the pair whereby more turbulent fluid flow channels are provided through the stack, i.e. around the columns and under or over each ligament.

Thus the flow is in the general direction of the plane of the plates in that the fluid crosses the plate from one edge to an opposite edge thereof. However, additional turbulence is caused by flow under and over the ligaments.

In another aspect the invention provides a perforated plate having an array of spaced column precursors, the column precursors being of thickness equal to the plate thickness and being joined together by ligaments, each ligament extending between a pair of adjacent column precursors, the ligaments having a thickness less than the plate thickness.

The top and bottom of the stack may each be closed by a conventional solid plate, and inlet, outlet, header tank and like features may be provided as required. Side plates or bars of the stack may conveniently be formed by the stacking of unperforated border regions around the edges of individual plates of the stack, the unperforated border regions being integrally formed as part of the plate.

Preferably the perforations in the plates and the reduced thickness of the ligaments are both produced by photochemically etching, such a technique being well known in the art. However other means, e.g. spark erosion, may be used, if desired.

It is preferred that at least two different patterns of ligaments are used so that the ligaments do not completely coincide through the stack. Preferably at least two different plates are provided, i.e. the plates have different ligament patterns. Thus a tortuous flow path through the stack is provided not only around and normal to the longitudinal axes of the columns but also across the surfaces of the ligaments.

The column precursors, and hence the columns, may, in a preferred embodiment, be of circular transverse cross-section but this is not essential and any other desired cross-section may be utilised, e.g. elliptical, square, rectangular, triangular and so on, by appropriate choice of the pattern to be etched or otherwise formed in the plate.

The size, i.e. cross-sectional area, and pitch of the columns can be varied widely to suit particular circumstances and the skilled man of the art will readily be able to determine dimensions and arrays appropriate to a particular need. Similarly, the thickness and width of the ligaments, the thickness of the plates and the number of plates in the stack may be determined to achieve a required result.

A plurality of stacks of the invention may be joined together, each stack of perforated plates being separated from an adjacent stack by an unperforated, i.e. solid, plate, whereby two or more fluid streams may pass separately through the multi-stack to achieve desired heat transfer between the streams.

In an alternative embodiment a plurality of stacks of the invention may be provided in which adjacent streams are separated not by an unperforated plate but by a plate having perforations to allow controlled injection of fluid at higher pressure from one stream into fluid at lower pressure in an adjacent stream, e.g. for chemical reaction purposes.

The thickness of the ligaments may be chosen to cause more or less interruption to fluid flow as required. Thus variations in the velocity of and turbulence in the fluid flow may be achieved by appropriately designed plate patterns. Increased heat transfer (and associated pressure drop) may, therefore, be achieved by appropriate changes to the ligament dimensions. Thus thinner ligaments may be employed when it is desirable to minimise such effects.

The plates may be circular, rectangular or of any other desired shape in plan and may be formed of any suitable material, usually metal, that can be made, e.g. by etching, to the desired column and ligament patterns. The plates of a stack are preferably all of the same material and are preferably thin sheets of metal of e.g., 0.5 mm thickness or less. The material is preferably stainless steel but other metals, e.g. aluminium, copper, titanium or alloys thereof, may be used.

The components of a stack may be bonded together by diffusion bonding or by brazing or by any other suitable means. Diffusion bonding, where possible, may be preferred but, in the case of aluminium, which is difficult to diffusion bond, brazing may be necessary. It is then preferable to clad the aluminium surfaces, e.g. by hot-roll pressure bonding, with a suitable

brazing alloy, in order to achieve satisfactory bonding by the brazing technique, although other means to provide the braze medium may be used, e.g. foil or vapour deposition.

The plates of the stack may be provided at their edges with extensions. In one form the extensions may be lugs to assist location of the plates in a stack. Such lugs may be designed to be broken off after the stack has been assembled, e.g. by etching partway through their thickness along a line where the lug joins the plate. Alternatively and/or additionally, the extensions may be of a form to fit together in the stack to provide, e.g. one or more tanks on the side faces of the stack. Each such extension may be, for example, in the form of a flat loop, e.g. of semi-circular profile, providing an aperture at the edge of the plate, whereby the apertures of adjacent plates form the volume of the tank when the plates are stacked together. The loops may be attached to the plates not only at their ends but also across the aperture by means of narrow cross-members to provide additional mechanical support and so give greater resistance to internal pressure. The tanks so formed can each feed a fluid into the passageways across the stack.

It is known that chemical reactions can be catalysed inside a structure such as a heat exchanger by providing a deposit of catalytic material in the internal passageways through which the fluid(s) to be catalysed are passed.

In a further embodiment of the invention is provided a heat exchanger/catalytic reactor having a plurality of passageways to contain catalytic material to promote a chemical reaction in fluid(s) to be passed through those passageways, those passageways being separated by an

intervening plate from a stack of parallel perforated plates having a pin-fin structure according to the present invention. Thus the stack of plates separated by the intervening plate from the adjacent passageways, which later will be filled with catalytic material, is formed from perforated plates, each having an array of spaced column precursors, the column precursors being of thickness equal to the plate thickness and being joined together by ligaments extending between pairs of adjacent column precursors, the ligaments having a thickness less than the plate thickness. Once the heat exchanger structure has been completed and tested, the catalytic material may be packed into its passageways. However, the packing of the catalytic material will normally be completed immediately prior to the installation of the heat exchanger/reactor into its desired use position.

The passageways to contain the catalytic material are preferably defined between parallel ribs running the length of their plates to allow convenient introduction of the catalytic material and its subsequent removal at the end of its life cycle. The passageways may be closed off at one or both ends by a mesh to retain the catalytic material.

By means of this further embodiment, heating or cooling can very effectively be provided for the chemical reaction by passing a heating or cooling fluid through the stack of plates adjacent to the layers containing the catalyst. As indicated above, this structure causes such tortuous flow and turbulence that very good heat transfer properties can be achieved, especially with gaseous fluids. The catalysed reaction may, therefore, if exothermic, be effectively cooled by passage of a suitable cooling fluid, or if endothermic,

may be heated and hence initiated or improved by passage of a suitable heating fluid, through the pin-fin stack.

This further embodiment may also be used in conjunction with the above-described injection construction, i.e. the heat exchanger may have a first stack containing the passageways containing catalytic material, an adjacent second stack separated from the first stack by an intervening plate with injection holes and a third stack of the pin-fin cooling or heating construction. The first stack may, for example, lie between the second and third stacks, or they may lie in the order - first, second, third. Needless to say, these three stacks maybe repeated a number of times to form the complete heat exchanger/reactor.

Embodiments of the invention will now be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a plan view of one perforated plate of the invention;

Figure 2 is an enlarged view of a portion of the central region of the plate of Figure 1;

Figure 3 is a section through the thickness of the perforated plate of Figure 1 at an edge region thereof;

Figure 4 is a diagrammatic illustration in plan view in enlarged scale of a central portion of a second perforated plate of the invention;

Figure 5 is a similar illustration to Figure 4 of a third perforated plate of the invention;

Figure 6 is a similar view of the plates of Figures 4 and 5 stacked together;

Figure 7 is a perspective view, partly exploded, of a heat exchanger of the invention suitable for use as a catalytic reactor;

Figure 8 is a diagrammatic representation of the plate arrangement inside the heat exchanger of Figure 7;

Figure 9 is a plan view of a stack of three first type of plates used in the heat exchanger of Figure 7 to provide the passageways for a process fluid to undergo chemical reaction;

Figure 10 is a section on line X-X of Figure 9;

Figure 11 is a plan view of a stack of a second type of plate used in the heat exchanger of Figure 7 to provide a reactant fluid to be injected into the process fluid;

Figure 12 is a plan view of another stack of plates similar to the plates of Figure 11, which stack is used in the heat exchanger of Figure 7 to provide a cooling or heating fluid as required;

Figure 13 is a plan view of a separator or intervening plate to lie between the stacks of Figures 11 and 12;

Figure 14 is a plan view of an injection plate to lie between the stacks of Figures 9 and 11;

Figure 15 is a plan view of a portion of another plate for use in the invention; and

Figure 16 is a similar view to Figure 15 of a portion of a different plate for use in the invention.

In Figures 1, 2 and 3 is shown a thin perforated metal plate 10 of generally rectangular shape and having an unperforated border region 11 around its perimeter. Four integral loops 12, one adjacent each corner of the plate, define apertures 13 which, when a stack of similar plates is assembled, form tanks through which inlets and outlets to and from the stack can be positioned.

A positioning lug 14 is integrally formed centrally of each of the four edges of the plate to assist assembly into a stack of plates.

The central region 15 of the plate inside border 11 has been etched to provide a plurality of apertures 15A (Figure 2) defining an array of column precursors and ligaments, the ligaments joining adjacent column precursors together and to the border region 11. A portion of central region 15 is shown in greater detail in Figure 2.

In Figures 2 and 3 an array of column precursors 16 and ligaments 17 is shown. The column precursors are circular in cross-section and of height equal to the thickness of the plate. In this array they are arranged in lozenge shaped groups of four and each group is joined to three or four adjacent groups by ligaments from its column precursors to the precursors of other groups.

The ligaments 17 have been etched to half the thickness of the plate.

In Figure 4 the central region of plate 20 has an array of rectangular section column precursors 21 in rows, each column precursor in one row being attached to an adjacent precursor in the next row or rows by a diagonally-extending, relatively thin, i.e. in plan, ligament 22A or 22B. Ligaments 22A between a first pair of rows of column precursors are angled in the opposite direction to ligaments 22B between the next row and this is repeated across the plate.

In Figure 5, the central region of plate 30 has the same linear array of column precursors 31 as Figure 4. Column precursors 31 have the same dimensions as column precursors 21 of plate 20 and are spaced at the same positions in the plate. Plates 20 and 30 are of identical size.

Column precursors 31 are joined to the adjacent precursors in the same row by ligaments 32 and to adjacent precursors in the next row or rows by ligaments 33.

When plates 20 and 30 are stacked together with their column precursors aligned, the effect is shown in Figure 6, where plate 20 is shown above plate 30. Hence only column precursors 21 are visible.

The double headed arrow indicates possible flow directions when the plates are stacked to form a heat exchanger.

As can be appreciated when a plurality of pairs of plates 20 and 30 are stacked together, the ligaments 22A, 22B, 32 and 33 provide a tortuous path in addition to the need for the fluid to pass around the columns that are formed from the stacked column precursors. Thus excellent heat transfer properties can be achieved.

In Figure 7 a heat exchanger/catalytic reactor 50 has an inlet 51 and an outlet 52 for coolant (or if required a heating fluid to initiate an endothermic reaction) and an inlet 53 and an outlet 54 for a reactant fluid which is to be injected as described in greater detail below into a process fluid which passes through the open-through passageways 55 through reactor 50 in the direction of arrow A. The inlets and outlets lead into and out of tanks 60 and 61 respectively from which the fluids are fed into their appropriate stacks.

Reactor 50 will of course be connected in a fluid-tight manner to a pipeline (not shown) or other means of passing the process stream from a source, through the reactor 50 to a suitable receiving vessel by conventional means. Such connection may conveniently be made by bolting flanges 50A and 50B at either end of reactor 50 to corresponding flanges provided in the pipeline or other means using bolt holes 50C.

The passageways or channels 55 are defined in stacks of plates to be described with reference to Figures 9 and 10 below. These channels may be packed with catalyst and, after a period of use, the reactor 50 may be readily unbolted from its pipeline, the spent catalyst removed from channels 55 and fresh catalyst inserted so that the reactor is ready for re-use.

A mesh 55A mounted in a frame 55B can be clamped to flange 50B and/or 50A to retain the catalyst in the passageways 55.

The order or arrangement of plates in the reactor 50 is as shown in Figure 8.

At each end of the total stack of plates is a solid unperforated plate S, which is described with reference to Figure 13 below.

Above bottom plate S in Figure 8 is a stack A of plates defining passageways to receive the coolant (or heating) stream through inlet 51. The plates of stack A are described with reference to Figure 12 below.

Above stack A is another separator plate S. Above that plate S is stack B of plates defining passageways to receive a reactant fluid. The plates of stack B are as described with reference to Figure 11 below.

Above stack B is an injection plate I which is described with reference to Figure 14 below.

Above injection plate I is a stack C of plates defining the passageways 55 referred to above for the process fluid. The plates of stack C are described with reference to Figures 9 and 10 below.

Above stack C is another separator plate S.

This structure is then repeated with another stack A and so on as many times as is required to build up heat exchanger/reactor 50 to the desired capacity.

A separator plate S is shown in Figure 13. It has a rectangular plan form having a border region 56 which can be bonded to the corresponding border regions of adjacent plates by one of the means discussed above. Border region 56 encloses an unperforated, i.e. solid, central region 57 which prevents fluid flow passing from one side of plate S to its other side. Adjacent each corner of the plate S is a loop extension 58 defining an enclosed region or aperture 59. These loops 58 stack together with corresponding portions of the other plates stacked in the heat exchanger to form two inlet and two outlet tanks 60 and 61 respectively, one of each being visible in Figure 7.

The top plate of stack A is shown in Figure 12. Two or more such plates 70 are required and each is of a rectangular form having a border region 71 for bonding to adjacent plates and a central region 72. Region 72 is of pin-fin construction – not shown here but, for example, as shown in Figures 1 to 3. As with plate S, adjacent the corners of plate 70 are loops, two of which, 73A and 73B, in opposite corners, enclose an aperture 74 and the other two of

which 73C, 73D, open into central region 72, thereby providing entry and exit for coolant fluid passing across and through stack A via inlet 51 and outlet 52 shown in Figure 7.

The top plate of stack B is shown in Figure 11. Two or more such plates 80 are required and they are of identical structure to plates 70. Thus they have a border region 81 enclosing a central pin-fin region 82. They have enclosed loops 83A and 83B and loops 83C and 83D, the latter two loops providing an inlet and an outlet for reactant fluid to pass across and through stack B via inlet 53 and outlet 54 of Figure 7.

Injector plate I is shown in Figure 14. It is of the same rectangular form as the plates described above, having a border region 91 enclosing a central region 92. Region 92 is not imperforate but has a series of injection holes 90 passing through its thickness. Thus reactant fluid passing through stack B on one side of plate I can be arranged to be at higher pressure than process fluid passing through stack C on the other side of plate I, whereby the reactant fluid will be injected through holes 90 into the process fluid to cause the desired chemical reaction. Holes 90 can be of size and distribution to suit the required amount of reactant fluid to be injected.

As with the previously described plates, plate I has corner loops 93A, B, C, D, and each loop encloses an aperture 94 to form part of the tanks 60 and 61 shown in Figure 7.

The plates 100 of stack C are shown in Figures 9 and 10. Three plates are shown in this stack although it will be appreciated that more or less plates

may be used, as desired. Again, plates 100 are rectangular with a border region 101 along their two longer edges. Border regions 101A, 101B along their shorter edges are designed to be removed by cutting along lines X-X and XI-XI after the plates have been bonded to the other plates in the heat exchanger.

Central region 102 of each plate 100 has a series of parallel ribs 103 running along its longer length. Between adjacent pairs of ribs 103 and between each outermost rib 103 and border region 101 lie open channels 104, (equivalent to channels 55 in Figure 7). The channels extend completely through the thickness of the plate. When ends 101A and 101B are removed process fluid can pass from one side of stack C, where ends 101B were, along channels 104 and out at the other end, i.e. where ends 101A were, as indicated by arrows A. Arrows A here correspond to arrow A in Figure 7.

It will be appreciated that ribs 103 are held in their positions initially by being joined to ends 101A and 101B of plate 100. When the plates of the stacks are bonded together, ribs 103 bond to a plate I below or plate S above (as in the arrangement shown in Figure 8) or to the corresponding ribs of adjacent plates 100. Thus when ends 101A and 101B are removed, the ribs remain firmly in place.

Channels 104 may be packed with catalyst to promote the reaction between the process fluid passing across and through stack A with the injected reactant fluid for stack B.

Plates 102 each have corner loops 105A, B, C, D, completely enclosing apertures 106, to form part of the tanks 60 and 61.

By way of example only, plates 100 may be about 2 mm in thickness and the requisite number of such plates will be stacked together to give the desired channel height.

In Figure 15 is shown a loop extension portion of a plate 110.

The loop extension 111 defines a region of apertures 112, which opens into central region 113 of the plate, which is of the pin-fin construction described above. Thus this loop extension forms part of an inlet or outlet for the pin fin passageways.

Loop extension 111 is reinforced by cross-members 114, each extending from the inner perimeter of the loop to connect with a portion of the pin-fin structure 113.

In Figure 16 is shown another loop extension, of different shape, of a plate 120. The loop extension 121 defines apertures 122 which are closed off from the central pin-fin region 123 of the plate. Again the loop is strengthened by cross-members 124 which define the apertures 122 between the loop 121 and unperforated border region 125, which separates the apertures from the fin-fin region of the plate.

When two or more plates 110 or 120 are stacked together, it will be desirable to offset the cross-members 114 or 124 respectively from those of

adjacent plates so as to provide a tortuous route through the tanks formed by the stacked loops.

CLAIMS

1. A heat exchanger (50) comprising a stack of parallel perforated plates (10, 20, 30, 70, 80), each plate (10, 20, 30, 70, 80) of the stack having perforations (15A), characterised in that the perforations (15A) define an array of spaced column precursors (16, 21, 31), of thickness equal to the plate thickness, the column precursors (16, 21, 31) being joined together by ligaments (17, 22A, 22B, 32, 33), each ligament extending between a pair of adjacent column precursors, the ligaments (17, 22A, 22B, 32, 33) having a thickness less than the plate thickness, the column precursors (16, 21, 31) of any one plate being coincident in the stack with the column precursors (16, 21, 31) of any adjacent plate whereby the stack is provided with an array of individual columns, each column extending perpendicularly to the plane of the plates (10, 20, 30, 70, 80), whereby fluid flowing through the stack is forced to follow a tortuous flow path to flow around the columns.

2. A heat exchanger according to Claim 1, characterised in that the ligaments (22A, 22B; 32, 33) of each plate (20, 30) of each pair of adjacent plates are displaced relative to those of the other plate of the pair.

3. A heat exchanger according to Claim 1 or 2, characterised in that the top and bottom of the stack are closed by unperforated plates (S).

4. A heat exchanger according to Claim 1, 2 or 3, characterised in that the stack has side plates which are formed by the stacking of unperforated border regions (11, 56, 71, 81, 91, 101) around the edges of individual plates of the stack, the unperforated border regions being integrally formed as part of the plate.

5. A heat exchanger according to any preceding claim, characterised in that the perforations (15A) in the plates and the reduced thickness of the ligaments (17A, 22A, 22B, 32, 33) are produced by photochemical etching or spark erosion.

6. A heat exchanger according to any preceding claim, characterised in that at least two differently perforated plates (20, 30) are used, the two plates having different ligament patterns.

7. A heat exchanger according to any preceding claim, characterised in that the column precursors (16, 21, 31) are of circular cross section.

8. A heat exchanger according to any preceding claim, characterised in that it comprises a plurality of joined together stacks of the parallel perforated plates, each stack being separated from an adjacent stack by a solid unperforated plate (S) whereby two or more separate fluid stream passageways are provided.

9. A heat exchanger according to any preceding claim, characterised in that the perforated plates (10, 20, 30, 70, 80) are of metal of thickness 0.5 mm or less.

10. A heat exchanger according to any preceding claim, characterised in that the components of the stack are diffusion bonded together.

11. A heat exchanger according to any preceding claim, characterised in that the components of the stack are brazed together.

12. A heat exchanger according to any preceding claim, characterised in that the plates (10) of the stack are provided at their edges with extensions (14) to assist location of the plates in the stack.

13. A heat exchanger according to any preceding claim, characterised in that the plates (10, 70, 80, 90, 100, S) are provided with extensions in the form of loops (12, 58, 73, 83, 93, 111, 121) which stack together to provide one or more tanks at the sides of the stack.

14. A heat exchanger according to Claim 13, characterised in that the loops (111, 121) are reinforced by cross-members (114, 124).

15. A heat exchanger according to any preceding claim, characterised in that it includes a plurality of stacks of plates and one pair of adjacent stacks are separated by a plate (I) having perforations (90) to allow controlled injection of fluid at higher pressure from one stack into fluid at lower pressure in an adjacent stack.

16. A heat exchanger according to any preceding claim, characterised in that it additionally has a plurality of passageways (55, 104) to contain

catalytic material, those passageways being separated by an intervening plate (S) from the stack of parallel perforated plates (10, 20, 30, 70, 80).

17. A heat exchanger according to Claim 16, characterised in that the passageways (104) to contain the catalytic material are defined between plates (100) having parallel ribs (103) running the length of the plates.

18. A heat exchanger according to Claim 16 or 17, characterised in that the passageways (104) to contain catalytic material are closed at one or both of their ends by mesh material (55A).

19. A perforated plate, wherein the plate (10, 20, 30, 70, 80) has an array of spaced column precursors (16, 21, 31), the column precursors being of thickness equal to the plate thickness and being joined together by ligaments (17, 22A, 22B, 32, 33), each ligament extending between a pair of adjacent column precursors (16, 21, 31), the ligaments having a thickness less than the plate thickness.

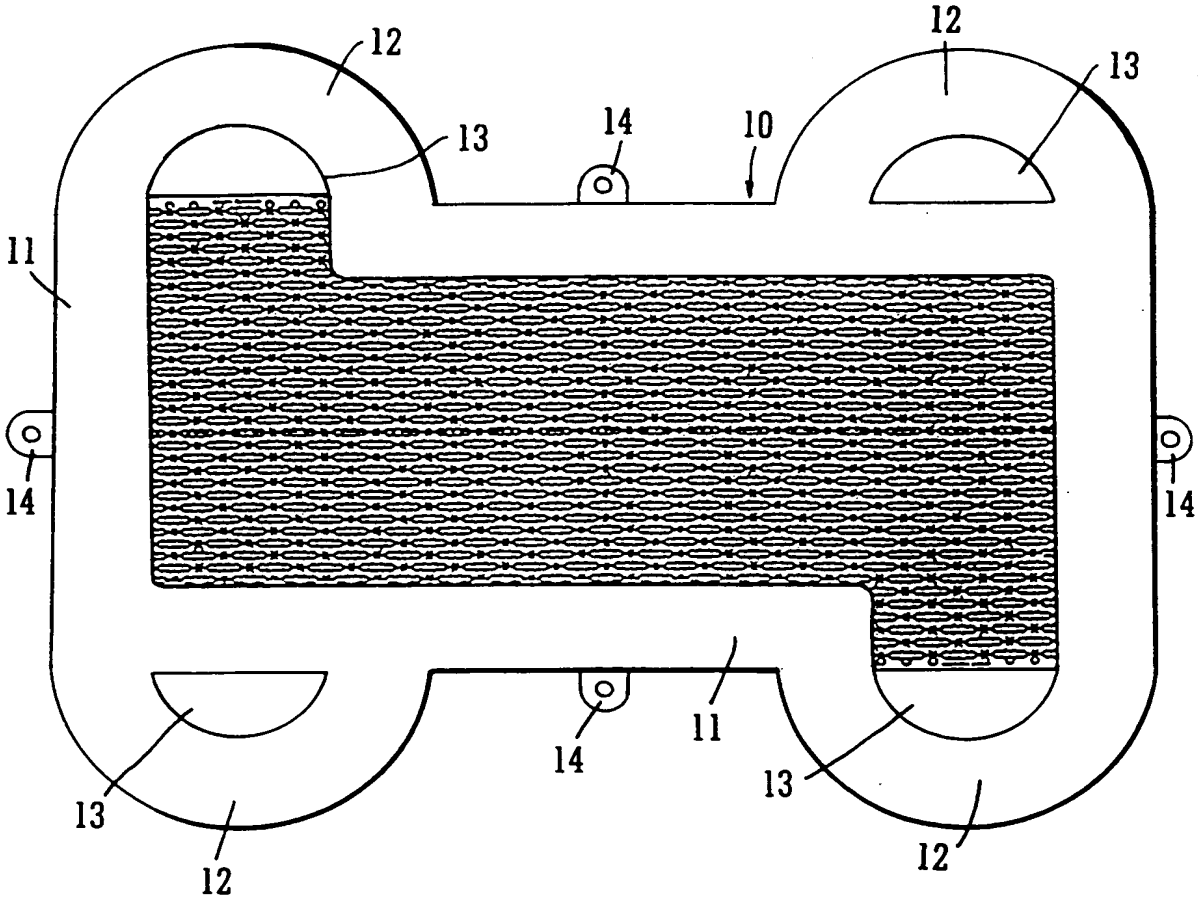


FIG. 1

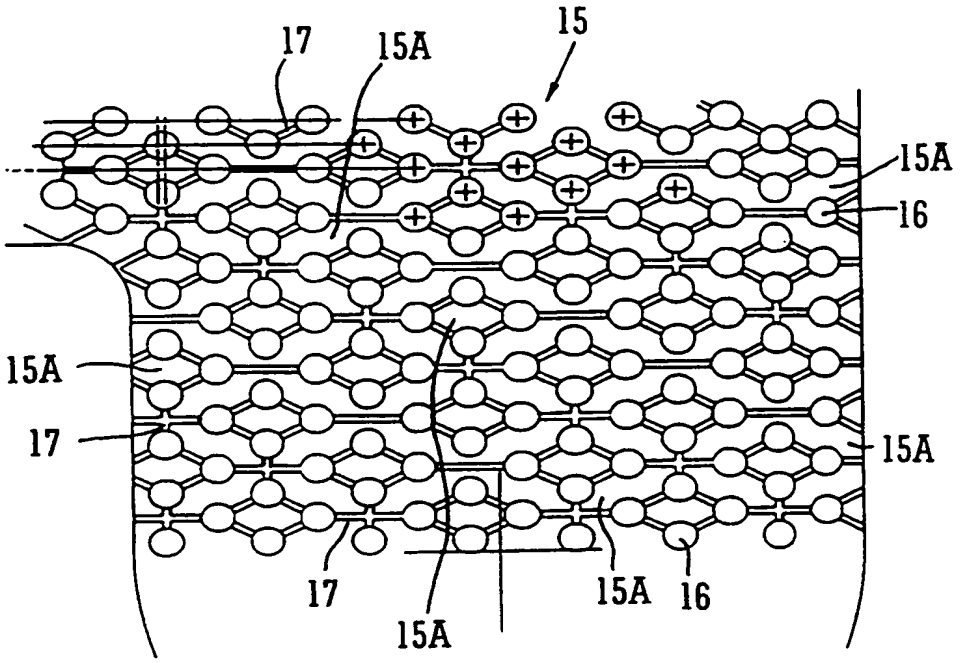


FIG. 2




FIG. 3

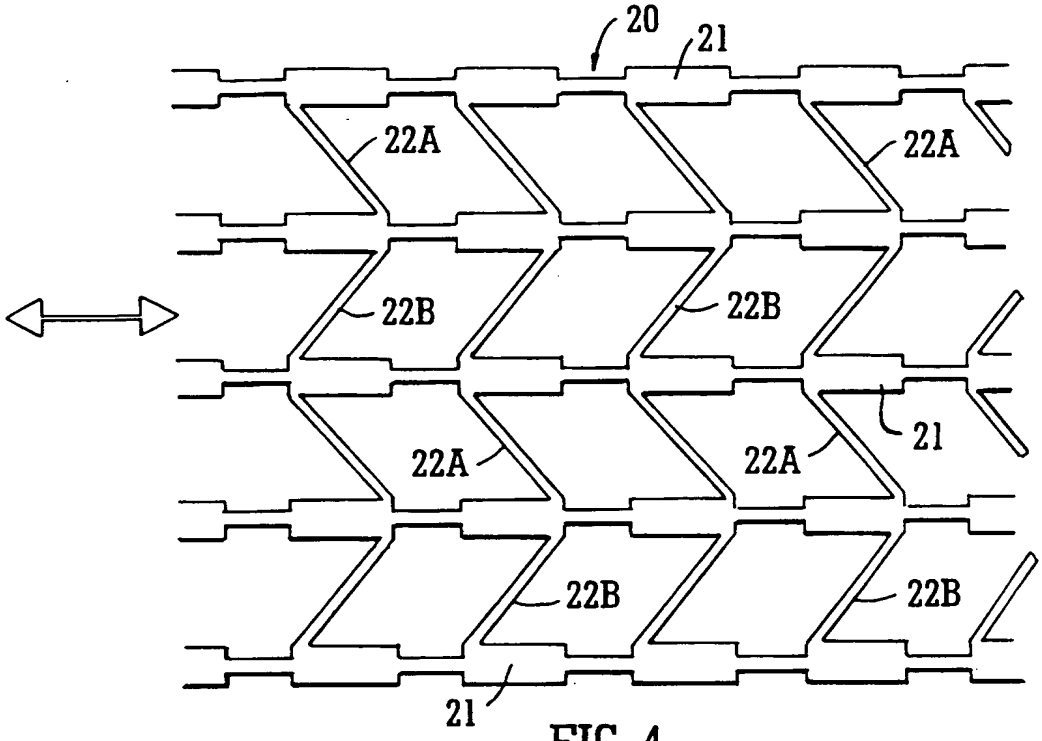

20
21
22A
22A
22B
22B
21
22A
22A
22B
22B
21

FIG. 4

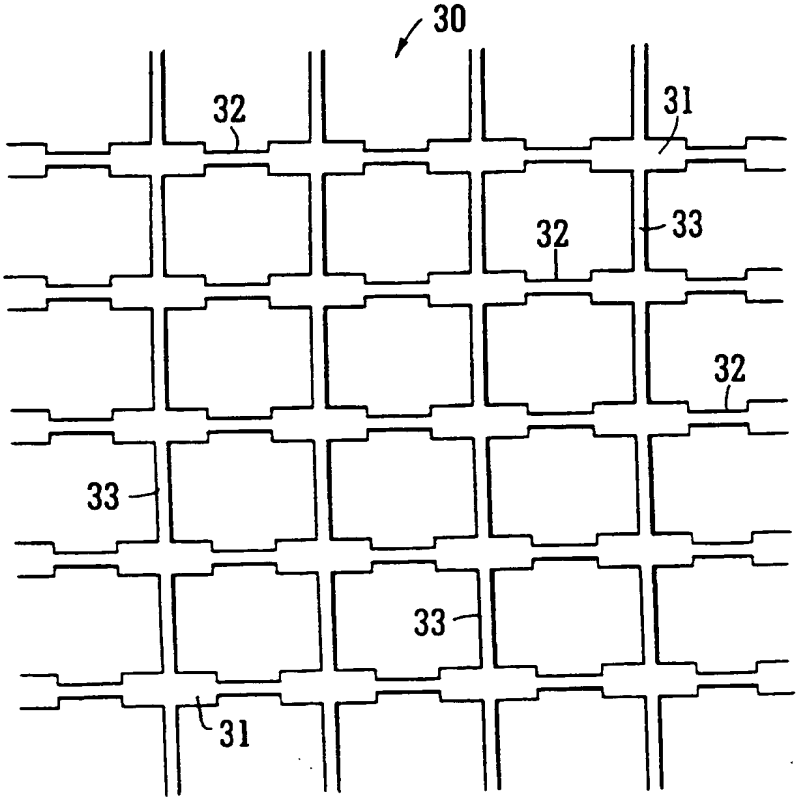

30
32
31
32
33
32
33
33
31

FIG. 5

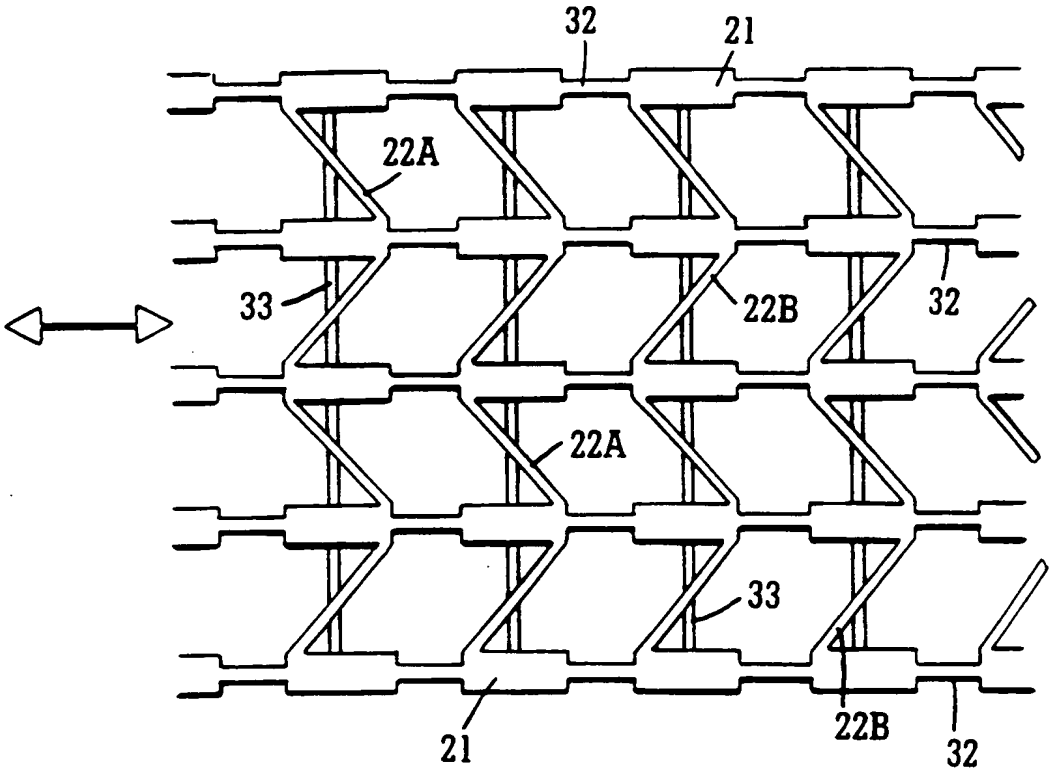


FIG. 6

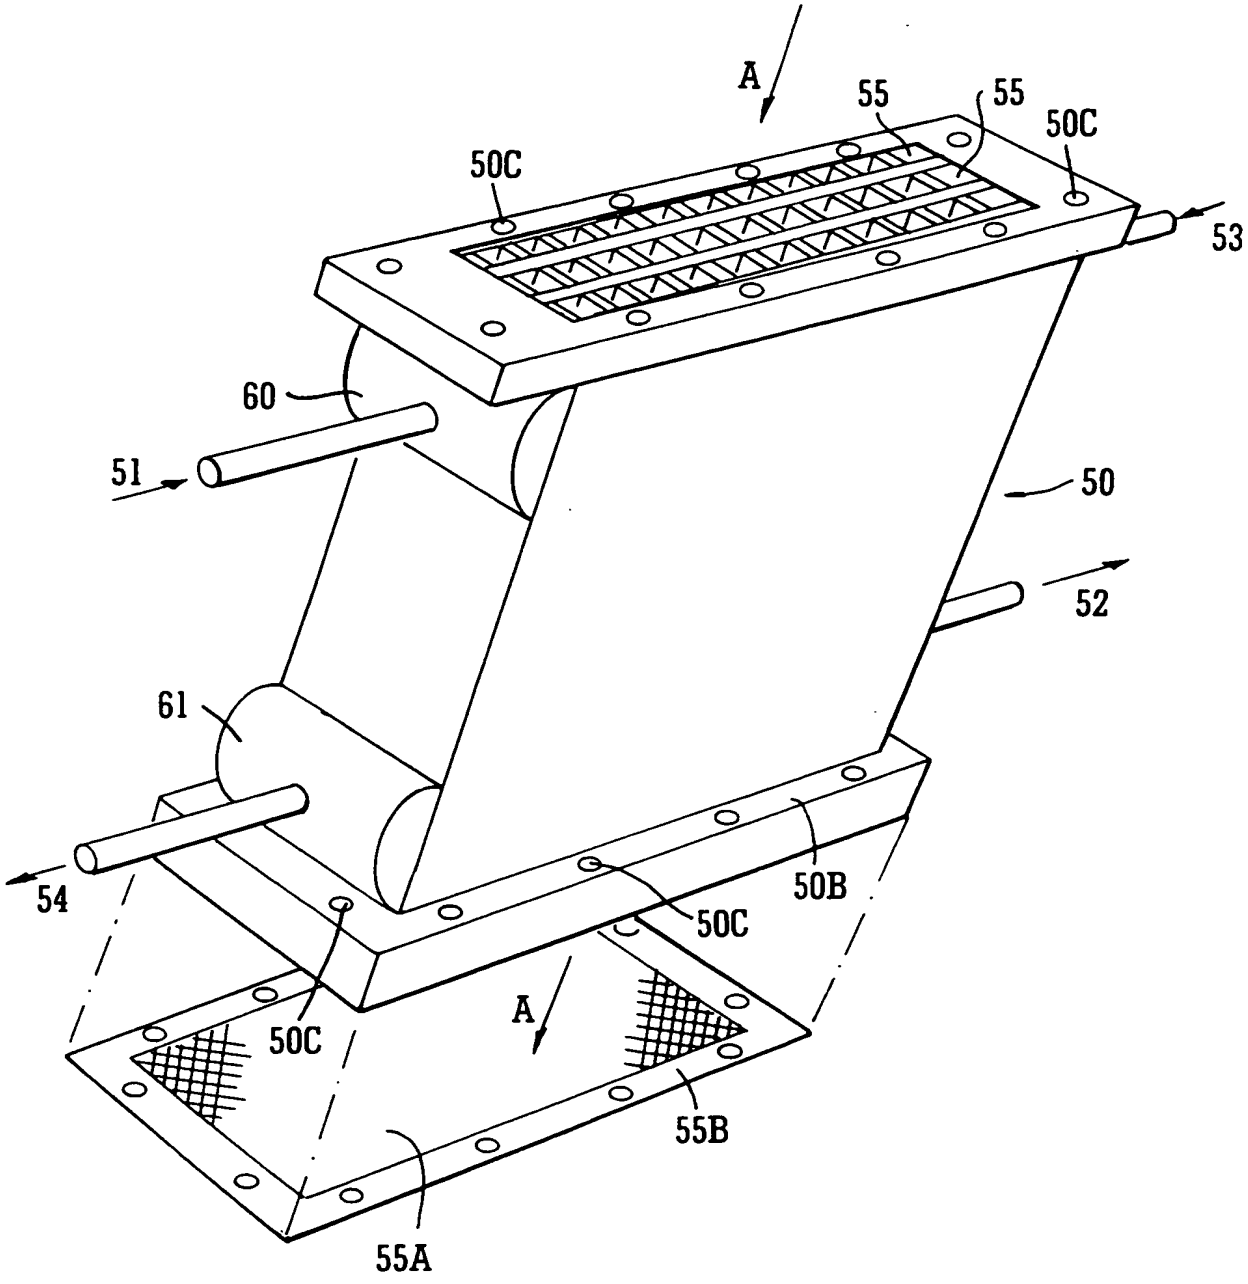


FIG. 7

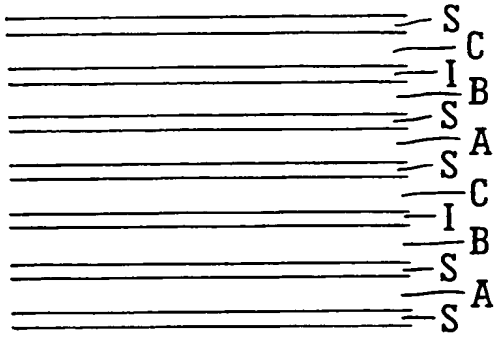


FIG. 8

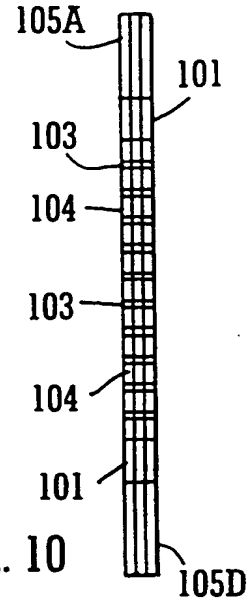


FIG. 10

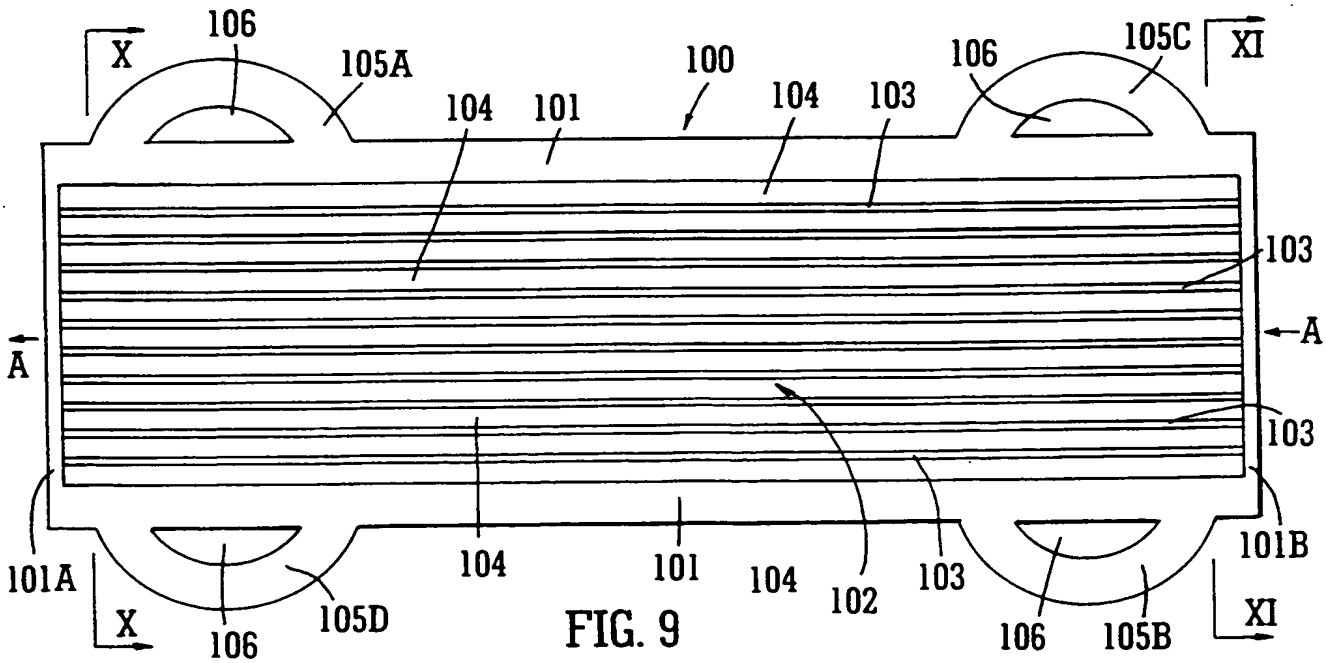


FIG. 9

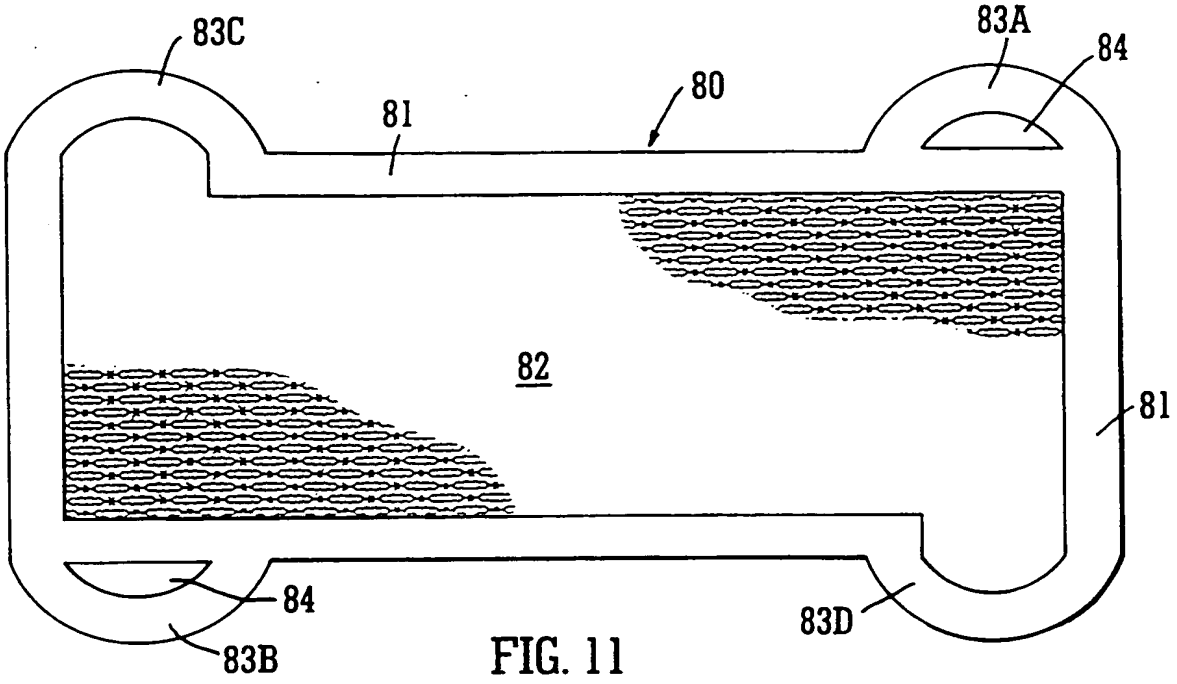


FIG. 11

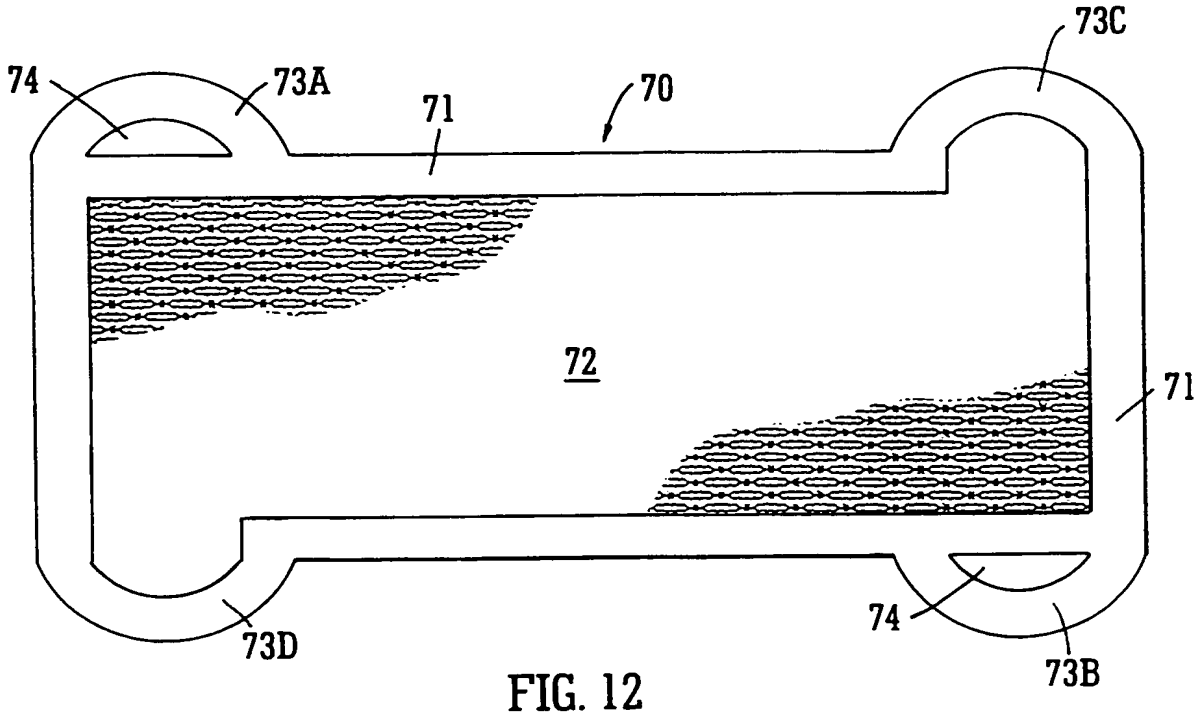


FIG. 12

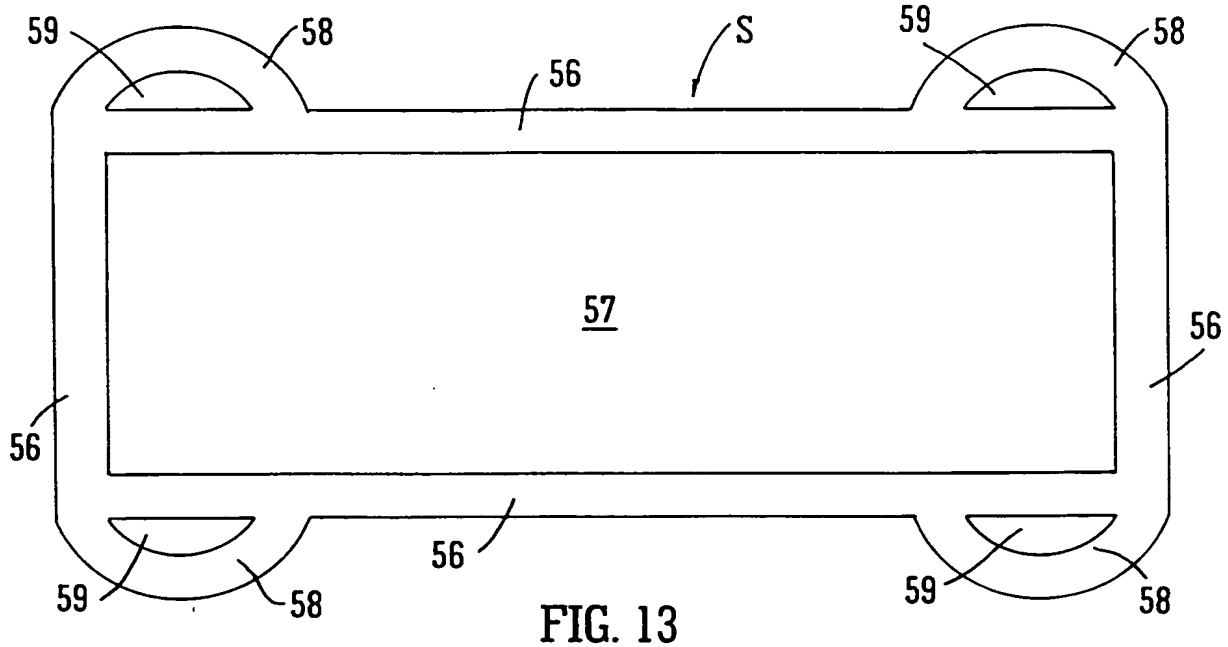

59
58
S
56
59
58
57
56
56
56
59
58
59
58

FIG. 13

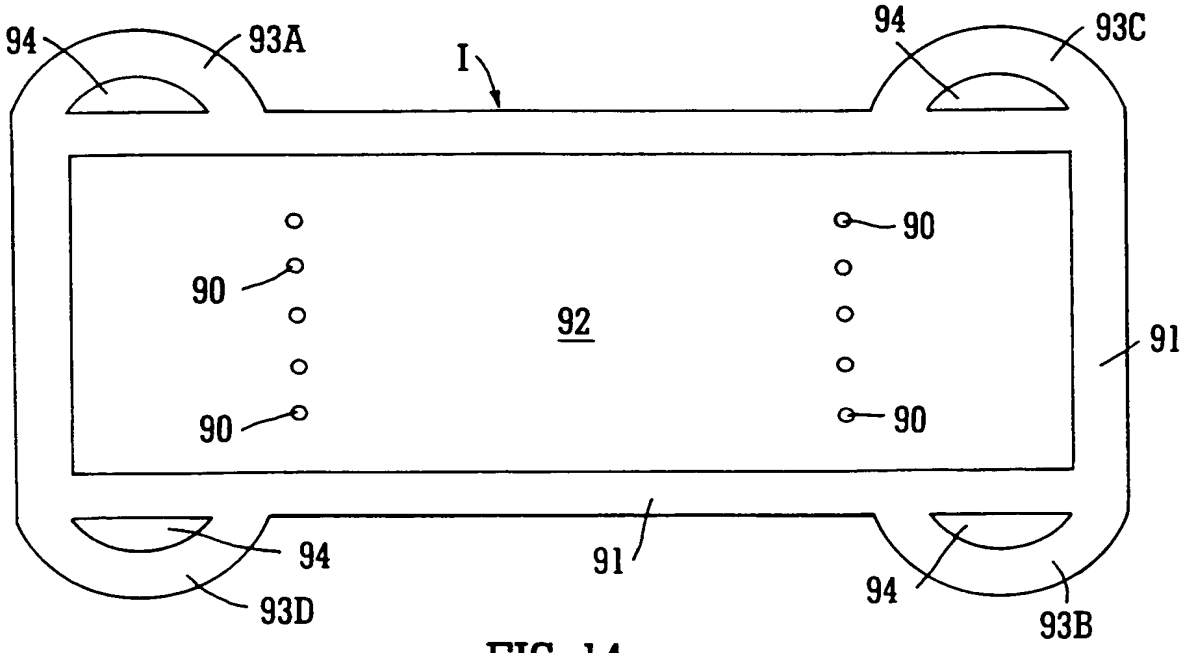

94
93A
I
94
93C
90
90
92
91
90
90
94
91
94
93D
93B

FIG. 14

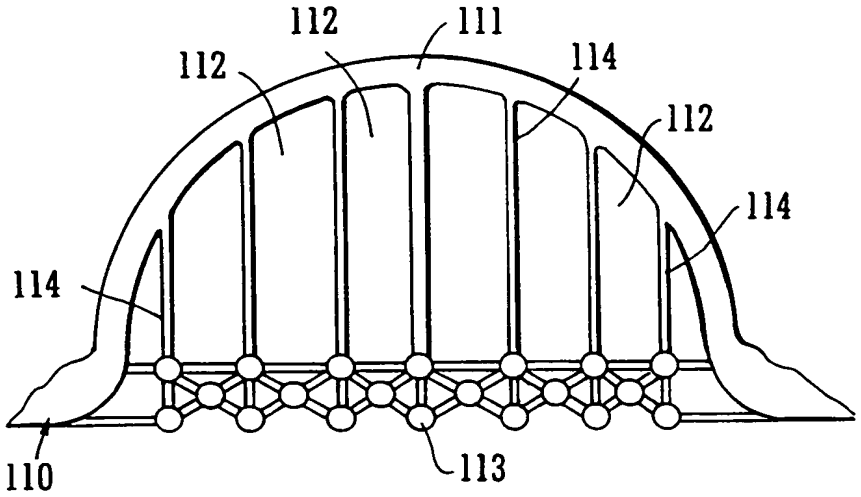

112
111
112
114
112
114
114
110
113

FIG. 15

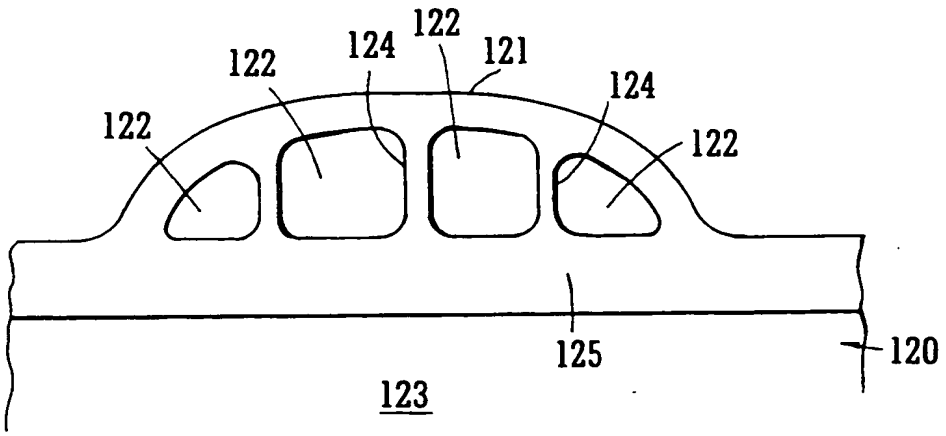

122
124
122
121
124
122
122
125
120
123

FIG. 16

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/01622

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F28D9/00 F28F3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 F28D F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 172 247 A (A.P.V. COMPANY) 26 November 1969 (1969-11-26)	13
A	page 2, line 33 - page 3, line 21; figures 1-6	1,2,4,8, 9,13
A	US 5 016 707 A (NGUYEN DAM C) 21 May 1991 (1991-05-21) column 6, line 19 - column 8, line 63; figures 1-11	1-3,6,19
A	US 5 193 611 A (HESSELGREAVES JOHN E) 16 March 1993 (1993-03-16) column 3, line 51 - column 5, line 40; claim 6; figures	1-5, 8-11,19

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 August 1999	31/08/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Van Dooren, M

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 99/01622

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 98 55812 A (CHART MARSTON LIMITED ;SYMONDS STEVEN PAUL (GB); SYMONDS KEITH THO) 10 December 1998 (1998-12-10) page 10, paragraph 7 - page 20; figures	1,5, 12-16
A	EP 0 111 459 A (PUCCI TAMARA ;MANDORLINI ORETTA (IT)) 20 June 1984 (1984-06-20)	
A	EP 0 780 654 A (MERLONI TERMOSANITARI SPA ;IL GAS P A SOC IT (IT)) 25 June 1997 (1997-06-25)	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 99/01622

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1172247 A	26-11-1969	AT 277294 B	29-12-1969
		DE 1551430 A	23-04-1970
		DK 129426 B	07-10-1974
		FR 1519235 A	11-07-1968
		NL 6705482 A,B	23-10-1967
		SE 333942 B	05-04-1971
US 5016707 A	21-05-1991	NONE	
US 5193611 A	16-03-1993	AU 640650 B	02-09-1993
		AU 5555190 A	29-11-1990
		CA 2050281 A	05-11-1990
		EP 0470996 A	19-02-1992
		WO 9013784 A	15-11-1990
		GB 2251679 A,B	15-07-1992
		JP 2862213 B	03-03-1999
		JP 4505046 T	03-09-1992
WO 9855812 A	10-12-1998	AU 7666798 A	21-12-1998
		GB 2328275 A	17-02-1999
		GB 2333350 A	21-07-1999
		GB 2333351 A	21-07-1999
EP 0111459 A	20-06-1984	IT 1192543 B	20-04-1988
		JP 59142382 A	15-08-1984
EP 0780654 A	25-06-1997	IT T0951023 A	19-06-1997
		CA 2193406 A	20-06-1997